



Document Number | V01\_161020

# Product specification

LSUM 129R6C 0062F EA



# Product specification

## ■ Specification

### 1. Primary specification

Part number	Capacitance (F)	Max. ESR (mΩ) <sub>DC</sub>	Max. Current (A) Non-repeated	Leakage Current (mA)
LSUM 129R6C 0062F EA	62	13.2	2,200	< 5 (For active), <27 (For passive)

### 2. Power & Energy

Part number	Usable Specific Power, $P_d$ (W/kg)	Impedance Match Specific Power, $P_{max}$ (W/kg)	Energy Density (Wh/kg)	Max. Stored Energy (Wh)
LSUM 129R6C 0062F EA	2,700	5,700	2.6	144.6

### 3. Standard & Reliability

Rated Voltage	129.6V		
Max. Voltage <sup>1</sup>	136.8V		
Maximum Series Voltage	1500V		
Capacitance Tolerance	0% / +20%		
Operating temperature range	-40 ~ 65 °C		
Storage temperature range	-40 ~ 70 °C		
Max. continuous current <sup>2</sup>	$\Delta T = 15$ °C	190A	
	$\Delta T = 40$ °C	260A	
Endurance Life (65°C)	1,500 Hours		
	Capacitance change	Within 20% of initially specified value	
	ESR change	Within 100% of initially specified value	
Life Time (25°C)	10 Years at rated voltage		
	Capacitance change	Within 20% of initially specified value	
	ESR change	Within 100% of initially specified value	
Cycle Life (25°C)	1,000,000 Cycles		
	Capacitance change	Within 20% of initially specified value	
	ESR change	Within 100% of initially specified value	
Shelf Life (25°C)	4 Years stored uncharged state		
Certifications	ROHS, REACH, E-mark		

### 4. Monitoring

Part number	Temperature sensor	Temperature & Voltage interface	Connector	Cell voltage monitoring	Balancing
LSUM 129R6C 0062F EA	NTC Thermistor	CAN 2.0B	KD3102A 16S-8P (5-pin)	Group voltage monitoring	Active or Passive

\*Remarks

1) Non repeated, not to exceed 1sec

2) Initial state value

# Product specification





## Safety & Physical Protection

Part number	Isolation voltage (DC)	Short circuit current(A)	Power Terminals	Recommended Torque - Terminal	Environmental Protection <sup>3</sup>	Shock & vibration Protection
LSUM 129R6C 0062F EA	4kV	9,800	M8 / M10	20 / 30 Nm	IP 67	IEC-61373

Dimension in mm (not to scale)

## Geometric properties

Part number	Dimension (mm)			Max. Weight (kg)
	Length	Width	Height	
LSUM 129R6C 0062F EA	720±2	405±2	226±2	55

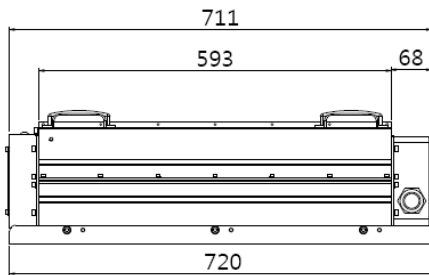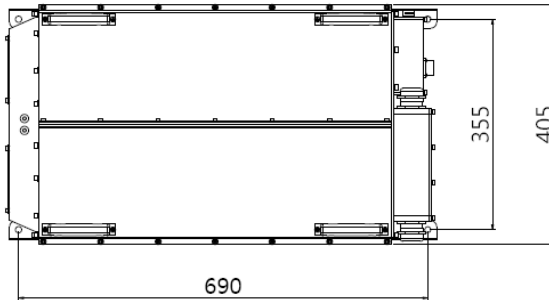

\*Remarks

3) As a test result of sample, This test result does not guarantee the whole product quality.